



NINGBO YILISI
AUTO SPARE PARTS CO., LTD.
宁波亿力斯汽车部件有限公司

NINGBO YILISI
AUTO SPARE PARTS CO., LTD.
宁波亿力斯汽车部件有限公司

地址：宁波市鄞州区瞻岐镇岐西工业区
Add: Qixi Industrial Zone, Zhanqi Town, Yinzhou District, Ningbo
电话 /Tel: +86-574-88073588 88073577 88073599
传真 /Fax: +86-574-88073566 88073507
Http: // www.ylsautoparts.com
E-mail: ylschina@hotmail.com / luffy_zhu@hotmail.com
邮编 /P.C: 315145

销售部 (Sales Department)

地址：宁波市江东区上东国际 1 号楼 205 室
Add: Room 205, 1# Building, Shang dong International
mansion, Jiangdong District, Ningbo
电话 /Tel: +86-574-87476862 传真 /Fax: +86-574-87474300
邮编 /P.C: +315100

汽车机械传动机带
Automotive Mechanical Belt
www.ylsautoparts.com



别克 Buick



宝马 BMW



奔驰 Benz



大众 Volkswagen



凯迪拉克 Cadillac



丰田 Toyota



东风日产 Nissan



奥迪 Audi



保时捷 Porsche



通用 GM



法拉利 Ferrari



雪佛兰 Chevrolet



雪铁龙 Citroen



标致 Peugeot



福特 Ford



路虎 Landrover



斯巴鲁 Subaru



起亚 Kia



马自达 Mazda



欧宝 Opel



本田 Honda



雷诺 Renault



沃尔沃 Volvo



现代 Hyundai



长安 Chana



比亚迪 BYD



三菱 Mitsubishi



铃木 Suzuki



时间可以成就一项前所未有的事业
集合大家所有的能量和智慧，共同为一个远大的目标而奋进

Time will make an unprecedented enterprise
gather all wisdom and energy keep moving, keep developing,
keep forging ahead for a lofty goal together

宁波亿力斯汽车部件有限公司是一家专业生产国际标准和国家标准汽车同步带、多楔带、切割式 V 带、橡胶衬套、油封和橡胶垫片的高科技企业，公司位于宁波市瞻岐镇岐西工业区，离宁波市中心 38 公里，海、陆、空交通十分便利。

企业产品质量、规格品种、生产能力于同行业中处领先地位，达到国外同类产品水平。产品被广泛应用于汽车、家用电器和各种办公机械的机械传动；深受国内外用户的一致好评。

公司采用先进的胶套硫化工艺，高精度的模具成型设计，科学的生产管理方法和完备的检测设备。公司拥有一支高素质的科技型人才队伍，具有雄厚的技术实力。已经形成一个完善的售前、售中、售后服务网络体系。本公司已经通过 ISO/TS16949 -2009 质量体系认证。


欢迎新老客户来我公司订购国标或非标产品，我们将以“最好的品质、优惠的价格、最快的速度”与您携手合作，共创辉煌！




采用日本进口优质合成氯丁胶（或氢化丁腈橡胶）为主要原料，配入多种不同用途的辅料；骨架材料为日本进口优质玻璃纤维线绳；带齿面采用尼龙66高弹力布做保护，并严格按照技术规范制作。具有外观整洁、齿形饱满、使用寿命长、噪音低、耐热、耐油、耐老化等特点。

The company applies the superior imported polymerized chloroprene rubber (or hydrogenated nitrile-butadiene rubber HNBR) from Japan as main raw materials. It matches with multiple auxiliary materials with different uses. Framework materials are the superior imported glass fiber cord from Japan.


Belt tooth surface applies nylon 66 Lycra as protection. It has been manufactured in strict accordance with the technical standards. It features as the tidy outline, full tooth profile, long service life, low noise etc.

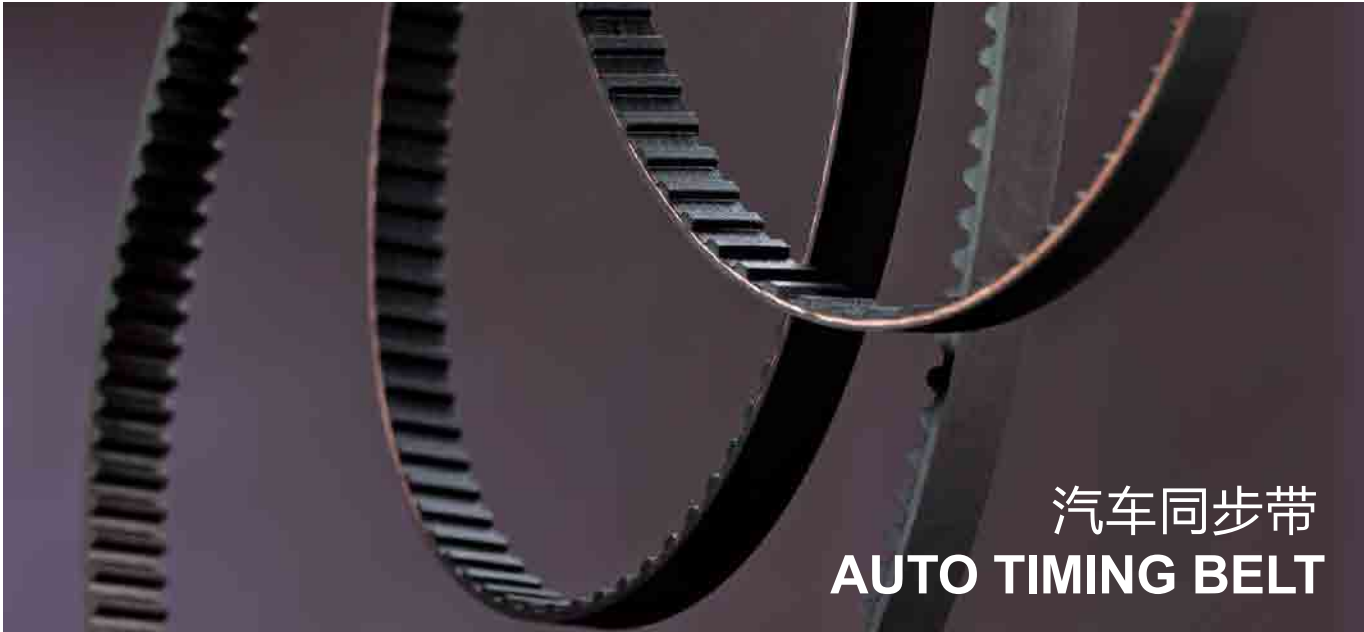


同步带结构及材料 | Structure And Material

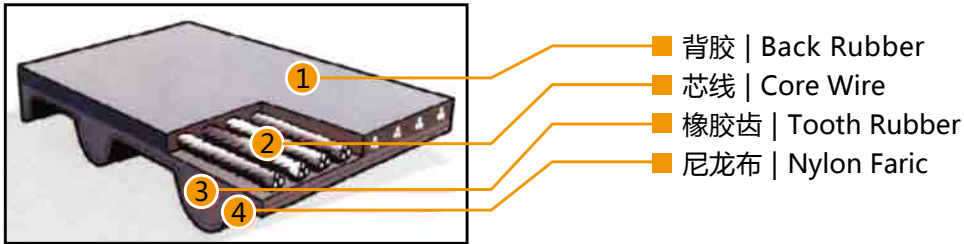

规格型号标记示例 | Example of Marks

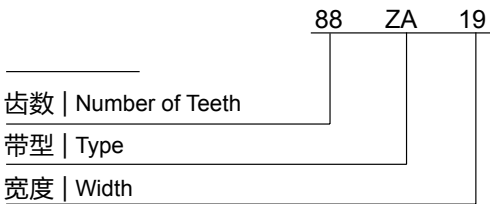

截面尺寸 | Section Dimension ZA/RU型 (Type)




型 号 / Specification								
ZA	55ZA13	69ZA19	91ZA19	102ZA19	118ZA19	124ZA25		
	110ZA18	80ZA19	92ZA19	106ZA19	120ZA19	126ZA25		
	120ZA18	84ZA19	93ZA19	109ZA19	121ZA19	127ZA25		
	121ZA18	88ZA19	94ZA19	111ZA19	123ZA19	133ZA25		
	124ZA18	89ZA19	95ZA19	115ZA19	111ZA25	148ZA25		
	54ZA19	90ZA19	98ZA19	116ZA19	112ZA25	169ZA34		
RU	70RU16	110RU21	148RU23	126RU24	110RU25	134RU25	123RU28	120RU30
	101RU17	113RU21	101RU24	89RU25	113RU25	149RU25	148RU28	141RU30
	89RU19	143RU21	106RU24	93RU25	124RU25	157RU25	152RU28	145RU30
	97RU19	92RU22	107RU24	95RU25	126RU25	125RU26	196RU28	152RU30
	92RU19	105RU22	108RU24	97RU25	127RU25	126RU26	112RU29	108RU32
	95RU19	138RU23	111RU24	103RU25	129RU25	126RU27	150RU29	
	122RU19	142RU23	113RU24	104RU25	131RU25	132RU27	151RU29	
	122RU20	143RU23	124RU24	108RU25	133RU25	134RU27	152RU29	
S8M	58S8M17	130S8M20	169S8M24	152S8M25	163S8M27	201S8M30	218S8M32	
	112S8M19	146S8M20	105S8M25	153S8M25	164S8M27	225S8M30	223S8M32	
	128S8M19	150S8M20	115S8M25	162S8M25	163S8M28	239S8M30	193S8M35	
	137S8M19	162S8M20	137S8M25	164S8M25	173S8M28	253S8M30	239S8M35	
	142S8M19	169S8M20	146S8M25	239S8M25	175S8M28	299S8M30	193S8M36	
	147S8M19	110S8M22	147S8M25	299S8M25	173S8M30	179S8M32		
	151S8M19	168S8M24	151S8M25	147S8M27	192S8M30	191S8M32		
ZBS	55ZBS13	122ZBS19	MY	107MY19	127MY24	178MY25	99MY38	
	76ZBS19	137ZBS23		117MY19	106MY25	124MY26	103MY38	
	117ZBS15	117ZBS25		121MY20	113MY25	128MY26		
	83ZBS19	163ZBS25		117MY21	117MY25	121MY28		
	92ZBS19	149ZBS30		121MY21	137MY25	116MY29		
	101ZBS19	119ZBS32		107MY22	143MY25	131MY30		
	117ZBS19			143MY23	159MY25	211MY32		
	120ZBS19			121MY24	177MY25	191MY36		
MR	129MR15	114MR17	113MR19	110MR21	101MR24	168MR24	116MR25	219MR25
	138MR15	92MR19	116MR19	105MR22	103MR24	176MR24	127MR25	143MR26
	87MR17	95MR19	118MR19	106MR22	104MR24	94MR25	128MR25	145MR26
	95MR17	102MR19	122MR19	109MR22	106MR24	97MR25	129MR25	153MR26
	97MR17	103MR19	125MR19	168MR22	107MR24	102MR25	130MR25	122MR27
	101MR17	104MR19	78MR20	132MR23	108MR24	104MR25	134MR25	123MR29
	104MR17	106MR19	97MR20	143MR23	113MR24	105MR25	136MR25	101MR30
	108MR17	109MR19	103MR20	148MR23	141MR24	108MR25	149MR25	153MR30
	111MR17	111MR19	113MR20	157MR23	166MR24	110MR25	151MR25	154MR30
	113MR17	122MR19	125MR20	167MR23	167MR24	111MR25	153MR25	178MR30
YU	63YU13	145YU22	135YU25	154YU29	195YU32			
	99YU19	154YU22	140YU25	156YU29	201YU32			
	109YU19	126YU23	168YU25	177YU30	207YU32			
	111YU19	123YU24	145YU26	200YU30	251YU32			
	101YU20	127YU24	197YU26	201YU30	257YU32			
	197YU20	107YU25	233YU27	202YU30	259YU32			
	107YU22	109YU25	111YU29	211YU30	265YU32			
	121YU22	113YU25	116YU29	281YU30				
	123YU22	133YU25	121YU29	187YU32				

汽车多楔带应用于传动发电机，风扇，水泵，空气压缩机和动力转向系统等多轮系传动，根据传动方式分单面多楔带，双面多楔带。柔韧的顶层织物能提高带体的横向刚度，并且能保护芯线和承受张紧轮的高速、高温环境下的摩擦。短纤维增强的氯丁胶、三元乙丙胶，确保皮带的耐磨、耐高温性能更佳。

Ribbed belt is used for driving generator, fans, water pumps, A/C compressors and power steering system etc. It is divided into ribbed belt and double ribbed belt according to transmission manner. Flexible cover fabric supports lateral stiffness to protect tension members, and endures the friction from tensioner under high temperature. Fiber-reinforced CR, EPDM rubber compound resists to wear and high temperature.




■ 多楔带结构及材料 | V-ribbed Belt Structure And Material

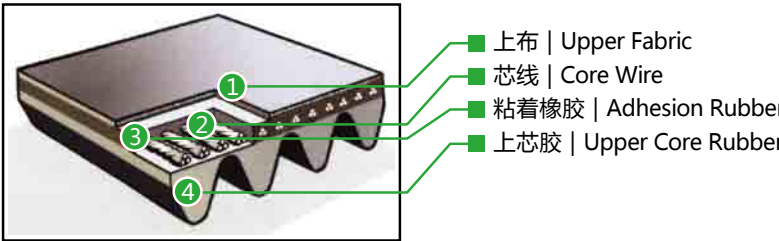


齿型 Profile	节距 Pitch	带高 Height	楔角 Angle	楔数 Rib No.
PH	1.60	3	40°	3-55
PJ	2.34	4	40°	2-38
PK	3.56	4-6	40°	3-25
PL	4.70	10	40°	3-19
PM	9.40	17	40°	3-9

■ 规格型号标记示例 | Example of Marks

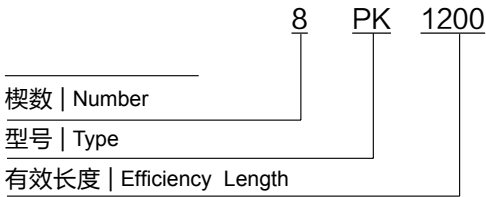

■ 截面尺寸 | Section Dimension

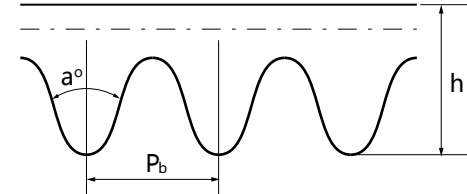

型 号 / Specification


PK495	PK805	PK1030	PK1285	PK1540	PK1760	PK1990	PK2230	PK2460
PK500	PK810	PK1035	PK1290	PK1545	PK1765	PK1995	PK2235	PK2465
PK505	PK815	PK1040	PK1295	PK1550	PK1770	PK2000	PK2240	PK2470
PK510	PK820	PK1045	PK1300	PK1555	PK1775	PK2005	PK2245	PK2475
PK515	PK825	PK1050	PK1305	PK1560	PK1780	PK2010	PK2250	PK2480
PK525	PK830	PK1055	PK1310	PK1565	PK1785	PK2015	PK2255	PK2490
PK535	PK835	PK1060	PK1315	PK1570	PK1790	PK2020	PK2260	PK2500
PK540	PK840	PK1065	PK1320	PK1575	PK1795	PK2025	PK2265	PK2510
PK545	PK845	PK1070	PK1325	PK1580	PK1800	PK2030	PK2270	PK2515
PK550	PK850	PK1074	PK1330	PK1585	PK1805	PK2040	PK2275	PK2525
PK555	PK855	PK1080	PK1335	PK1590	PK1810	PK2045	PK2280	PK2535
PK560	PK860	PK1085	PK1340	PK1595	PK1815	PK2050	PK2285	PK2540
PK565	PK865	PK1095	PK1345	PK1600	PK1820	PK2055	PK2290	PK2550
PK575	PK870	PK1100	PK1350	PK1605	PK1825	PK2060	PK2295	PK2555
PK580	PK875	PK1105	PK1360	PK1610	PK1830	PK2070	PK2300	PK2565
PK585	PK880	PK1110	PK1365	PK1615	PK1835	PK2075	PK2310	PK2575
PK590	PK885	PK1115	PK1372	PK1620	PK1840	PK2080	PK2314	PK2585
PK595	PK890	PK1120	PK1375	PK1623	PK1845	PK2085	PK2320	PK2590
PK600	PK892	PK1125	PK1380	PK1630	PK1850	PK2095	PK2325	PK2600
PK610	PK895	PK1130	PK1385	PK1635	PK1855	PK2100	PK2330	PK2605
PK615	PK900	PK1135	PK1390	PK1640	PK1860	PK2105	PK2335	PK2615
PK620	PK905	PK1140	PK1393	PK1645	PK1865	PK2110	PK2340	PK2620
PK625	PK915	PK1145	PK1400	PK1650	PK1870	PK2115	PK2345	PK2625
PK630	PK920	PK1150	PK1405	PK1655	PK1875	PK2120	PK2350	PK2630
PK635	PK925	PK1155	PK1410	PK1660	PK1880	PK2125	PK2355	PK2635
PK640	PK930	PK1160	PK1420	PK1665	PK1885	PK2130	PK2360	PK2648
PK650	PK935	PK1165	PK1425	PK1670	PK1892	PK2140	PK2365	PK2655
PK655	PK940	PK1170	PK1430	PK1675	PK1895	PK2145	PK2370	PK2665
PK660	PK945	PK1175	PK1435	PK1680	PK1900	PK2150	PK2375	PK2670
PK665	PK950	PK1185	PK1440	PK1685	PK1905	PK2155	PK2380	PK2680
PK670	PK955	PK1195	PK1445	PK1690	PK1910	PK2160	PK2385	PK2705
PK675	PK960	PK1200	PK1450	PK1695	PK1920	PK2165	PK2390	PK2715
PK685	PK965	PK1205	PK1455	PK1700	PK1925	PK2170	PK2395	PK2725
PK690	PK970	PK1210	PK1460	PK1705	PK1930	PK2175	PK2400	PK2730
PK695	PK975	PK1215	PK1465	PK1710	PK1935	PK2180	PK2405	PK2745
PK700	PK985	PK1220	PK1470	PK1715	PK1940	PK2185	PK2415	PK2800
PK725	PK990	PK1225	PK1475	PK1720	PK1950	PK2190	PK2420	PK2835
PK735	PK995	PK1230	PK1485	PK1725	PK1955	PK2195	PK2425	PK2825
PK750	PK1000	PK1245	PK1490	PK1730	PK1960	PK2200	PK2430	PK2868
PK760	PK1005	PK1250	PK1510	PK1735	PK1965	PK2205	PK2435	PK2870
PK765	PK1010	PK1260	PK1515	PK1740	PK1970	PK2210	PK2440	
PK770	PK1015	PK1270	PK1525	PK1745	PK1975	PK2215	PK2445	
PK785	PK1020	PK1275	PK1530	PK1750	PK1980	PK2220	PK2450	
PK800	PK1025	PK1280	PK1535	PK1755	PK1985	PK2225	PK2455	

切割式V带由强度高，柔韧性好的拉力构材和耐热橡胶成分组成，具有尺寸稳定，传动功率大，使用寿命长，传动效率高等优点。主要由于发电机，风扇，水泵，压缩机等。

Raw edge V belt made of high strength, flexible tension members and heat-resistant rubber compounds. It is high power and efficiency, long use life, more stable dimension etc. Mainly used for fans, water pumps, compressors etc.



■ 切割式V带结构图与型号 | Raw Edge V Belt Structure And Type

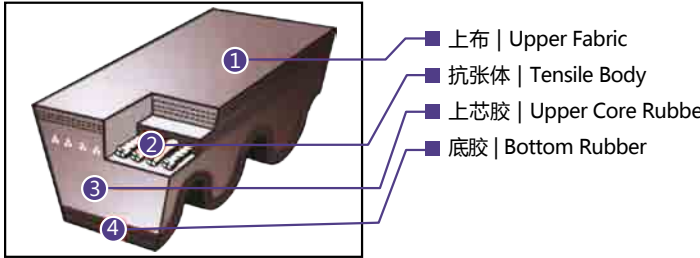


型号 Type	宽 Wide	带高 High	角度 Angle
AVX10	10	8	38°
AVX13	13	9	40°
AVX17	17	11	40°
AVX22	22	13	40°

■ 规格型号标记示例 | Example of Marks



■ 截面尺寸 | Section Dimension



型 号 / Specification

455	900	1250	1580	1870	2200	2480	780	1160
470	905	1255	1580	1875	2205	2485	790	1170
480	910	1260	1590	1880	2210	2490	792	1180
545	915	1265	1595	1885	2215	2495	810	1200
550	925	1270	1600	1890	2220	2500	840	1215
555	930	1275	1605	1895	2225	2505	863	1220
560	935	1280	1610	1900	2230	2510	915	1225
575	945	1285	1620	1905	2240	2515	940	1235
585	950	1287	1630	1910	2245	2520	965	1255
590	955	1300	1635	1915	2250	2525	1041	1265
595	965	1305	1640	1920	2255	2530	1067	1280
605	975	1315	1645	1925	2260	2540	1092	1310
610	980	1320	1650	1930	2265	2550	1473	1313
615	985	1325	1655	1935	2270	2560	474	1435
625	990	1335	1660	1945	2275	2565	800	1340
630	995	1340	1665	1950	2280	2575	960	1450
635	1005	1345	1670	1955	2285	2585	1205	1467
640	1010	1355	1675	1960	2290	2590	1245	1370
645	1020	1360	1680	1970	2295	2600	1250	1485
650	1025	1365	1685	1975	2300	2605	1260	1615
660	1030	1370	1690	1980	2305	2615	1275	1635
665	1040	1375	1695	1985	2310	2625	635	1800
670	1050	1380	1700	1990	2315	2635	665	1810
675	1055	1385	1705	2005	2320	2650	715	1840
680	1065	1390	1710	2010	2325	2655	763	2546
685	1070	1395	1715	2015	2330	2665	765	
690	1075	1400	1720	2020	2335	2670	775	
695	1080	1405	1725	2025	2340	2675	799	
700	1085	1410	1735	2030	2345	2680	785	
705	1090	1420	1745	2035	2350	2685	800	
710	1100	1425	1750	2040	2360	2700	815	
715	1105	1430	1755	2045	2365	2705	845	
720	1110	1435	1760	2050	2370	2715	850	
725	1115	1440	1765	2055	2375	2720	850	
735	1120	1445	1770	2060	2380	2730	875	
740	1125	1460	1775	2065	2385	2765	885	
745	1130	1465	1780	2075	2390	2770	925	
750	1135	1475	1785	2080	2395	2795	950	
755	1145	1480	1790	2090	2400	2860	975	
785	1150	1485	1795	2095	2405	2870	980	
795	1160	1490	1800	2105	2410	2875	990	
800	1165	1495	1805	2110	2415	2880	1015	
810	1170	1500	1810	2120	2420	2885	1020	
815	1175	1505	1815	2125	2425	2920	1025	
820	1180	1510	1820	2130	2430	625	1030	
825	1185	1515	1825	2135	2435	662	1039	
828	1190	1520	1830	2145	2440	690	1040	
855	1195	1525	1835	2155	2445	730	1061	
860	1205	1539	1840	2160	2450	748	1075	
865	1210	1540	1845	2165	2455	750	1085	
875	1225	1545	1850	2175	2460	757	1100	
880	1230	1560	1855	2180	2465	760	1134	
885	1235	1565	1860	2185	2470	765	1135	
895	1240	1575	1865	2195	2475	773	1150	